



AMRITA SUPPLY^{LLC}








FIRE SAFETY & DETECTION PRODUCTS



2 | FIRE EXTINGUISHERS

FIRE CLASSIFICATIONS

Class	Description	Class	Description
A <ul style="list-style-type: none"> TRASH WOOD PAPER 	Fires in ordinary combustibles such as wood, cloth, paper, rubber, and many plastics.	D COMBUSTIBLE METALS 	Fires in combustible metals such as magnesium, titanium, zirconium, sodium, lithium, and potassium.
B <ul style="list-style-type: none"> LIQUIDS GASES SOLVENTS 	Fires in flammable or combustible liquids, petroleum greases, tars, oil-based paints, solvents, lacquers, alcohols, and flammable gases.	K COOKING MEDIA 	Fires in cooking appliances that involve combustible cooking media such as vegetable or animal oils and fats.
C <ul style="list-style-type: none"> ELECTRICAL EQUIPMENT 	Fires that involve energized electrical equipment such as wiring, circuit breakers, machinery, and appliances.		

NFPA. *All About Fire*. <http://www.nfpa.org/news-and-research/news-and-media/press-room/reporters-guide-to-fire-and-nfpa/all-about-fire>. 2017.



21006204K

SINGLE-USE FIRE EXTINGUISHERS

Dependable and affordable, these single-use units offer excellent fire protection in and around the home. They come standard with corrosion-resistant powder-coated cylinders.

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
21006204K	5 lb ABC Service Lite w/ Wall Hook	5.5 lb	8.25 lb	16 ¹³ / ₁₆ "	7 ¹ / ₄ "	4 ¹ / ₂ "	3A:40B:C	466400K
21005766K	5 lb ABC Garage/Workshop w/ Wall Hook	5.5 lb	8.25 lb	16 ¹³ / ₁₆ "	7 ¹ / ₄ "	4 ¹ / ₂ "	3A:40B:C	466400K
21005753K	2.75 lb BC Kitchen w/ Wall Hook	2.9 lb	3.9 lb	14 ⁴ / ₁₆ "	4 ³ / ₄ "	3 ³ / ₄ "	10B:C	420118K
21005771K	4 lb ABC Living Area w/ Wall Hook	4 lb	7.13 lb	16 ¹³ / ₁₆ "	8"	4 ¹ / ₂ "	2A:10B:C	466400K



CONSUMER RECHARGEABLE FIRE EXTINGUISHERS

Designed for consumer-specific hazards found at home or in the office, this specialty line is suitable for Class A, B, and C fires.



21005782K

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
21005776K	2.5 lb ABC Pro 110 Consumer w/ Wall Hook	2.6 lb	4 lb	15"	5 ¹ / ₄ "	3 ³ / ₄ "	1A:10B:C	466401K
21005779K	4 lb ABC Pro 210 Consumer w/ Wall Hook	4 lb	7.5 lb	14"	8 ¹ / ₄ "	4 ¹ / ₂ "	2A:10B:C	466400K
21005782K	5 lb ABC Pro 340 Consumer w/ Wall Hook	5.5 lb	9 lb	16 ¹ / ₂ "	8 ¹ / ₄ "	4 ¹ / ₂ "	3A:40B:C	466400K
21005785K	10 lb ABC Pro 460 Consumer w/ Wall Hook	10 lb	17 lb	18 ³ / ₄ "	8 ¹ / ₄ "	5 ¹ / ₄ "	4A:60B:C	366242K

TYPES OF FIRE EXTINGUISHERS & THEIR USES		
Type of Agent	Class	Sample Applications
ABC Dry Chemical	ABC	Offices, Retail Stores, and Warehouses
BC Dry Chemical	BC	Paint Storage, Paint Booths
Clean Agent	ABC	Server Rooms
Class K Wet Chemical	K	Restaurant & Commercial Kitchens
Water	A	Offices, Assembly
Water Mist	AC	Computer Labs
Foam	BC	Flammable Liquid Storage, Dip Tanks
CO ₂	BC	Welding Shops
Class D Dry Powder	D	Machine Shops



466227K

PRO LINE™ MULTI-PURPOSE FIRE EXTINGUISHERS

Featuring metal valves and aluminum or steel cylinders, these extinguishers are designed to meet most commercial and industrial applications. Their seamless cylinders also come with chip-resistant paint, and their handles and levers are made of pressed heavy-gauge metal for added strength. Checking the pressure is fast and easy, too, thanks to at-a-glance gauges. These units use a non-toxic monoammonium phosphate agent that effectively fights Class A, B, and C fires.

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
466227K	2.5 lb ABC w/ Wall Hook	2.6 lb	3.9 lb	14¼"	5⅞"	3¼"	1A:10B:C	466401K
46622701K	2.5 lb ABC w/ Metal Vehicle Bracket	2.6 lb	3.9 lb	14¼"	5⅞"	3¼"	1A:10B:C	466401K
466112K	5 lb ABC w/ Wall Hook	5.5 lb	9 lb	16⅞"	7⅜"	4½"	3A:40B:C	466400K
46611201K	5 lb ABC w/ Metal Vehicle Bracket	5.5 lb	9 lb	16⅞"	7⅜"	4½"	3A:40B:C	466400K
466204K	10 lb ABC w/ Wall Hook	10 lb	16 lb	19½"	8⅞"	5¼"	4A:60B:C	366242K
466206K	20 lb ABC w/ Wall Hook	18 lb	30 lb	21⅜"	8⅞"	7"	6A:80B:C	292474K



466112K



466204K



468000K



468001K



468003K

PRO PLUS™ MULTI-PURPOSE FIRE EXTINGUISHERS

Full featured, covering industrial and commercial fire protection needs, these extinguishers come fitted with a pressure gauge (for at-a-glance status) as well as a durable metal valve, handle, and lever. An impact-resistant steel cylinder is also standard for each model. Suitable for Class A, B, and C fires.

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
468000K	2.5 lb ABC w/ Vehicle Bracket	2.6 lb	4.38 lb	15"	5½"	3"	1A:10B:C	24160B
468001K	5 lb ABC w/ Vehicle Bracket	5 lb	8.63 lb	15"	7¼"	4¼"	3A:40B:C	24530B
468002K	10 lb ABC w/ Wall Hook	10 lb	17.44 lb	19⅞"	7¼"	5¼"	4A:80B:C	366242B
468003K	20 lb ABC w/ Wall Hook	20 lb	31 lb	21⅜"	9¼"	7¼"	6A:120B:C	292474K

4 | FIRE EXTINGUISHERS

ADVANTAGE™ FIRE EXTINGUISHERS

Made to handle easier and recharge quicker, these extinguishers feature a larger neck opening and a square thread design for rapid valve removal. Their siphon tubes are also threaded for a more secure connection, and their hose straps won't scratch their cylinders. Their larger pull pins and handles are easy to use, too—even with work gloves. Depending on extinguisher size and fire type, they can be used in vehicles, homes, schools, offices, and more.



21007866B

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
21007865B	2.5 lb ABC w/ Vehicle Bracket	2.5 lb	5 lb	15"	5½"	3¼"	1A:10B:C	466401K
21007866B	5 lb ABC w/ Wall Hook	5 lb	9.5 lb	16¼"	7½"	4½"	3A:40B:C	466400K
21008936B	5 lb ABC w/ Vehicle Bracket	5 lb	9.5 lb	16¼"	7½"	4½"	3A:40B:C	466400K
21007867B	10 lb ABC w/ Wall Hook	10 lb	17.5 lb	19½"	8"	5½"	4A:60B:C	366242K
21007868B	20 lb ABC w/ Wall Hook	18 lb	31.5 lb	21¼"	9"	7½"	6A:80B:C	292474K



STANDARD MULTI-PURPOSE FIRE EXTINGUISHERS

Extremely versatile, these units easily tackle the majority of fire risks found in commercial, industrial, and domestic applications. They contain the highest percentage of essential base ingredients found in the fire extinguisher industry. Suitable for use on Class A, B, and C fires.



22603B

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
22430B	2.5 lb ABC w/ Vehicle Bracket	2.5 lb	5.4 lb	14¾"	5½"	3"	1A:10B:C	24160B
22435B	5 lb ABC w/ Wall Hook	5 lb	10 lb	15¼"	7¼"	4¼"	3A:40B:C	24530B
22486B	5 lb ABC w/ Vehicle Bracket	5 lb	10 lb	15¼"	7¼"	4¼"	3A:40B:C	24530B
22603B	10 lb ABC w/ Wall Hook	10 lb	17 lb	18¼"	7¾"	5¼"	4A:80B:C	366242K
22682B	20 lb ABC w/ Wall Hook	20 lb	33 lb	21½"	9¼"	7¼"	6A:120B:C	292474K



23384B

EXTRA DRY CHEMICAL FIRE EXTINGUISHERS

A versatile line of stored-pressure dry chemical extinguishers, they're a good choice for fire risks in most commercial and industrial settings.



23476B

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
23384B	2.5 lb ABC w/ Vehicle Bracket	2.5 lb	5.9 lb	14¾"	5½"	3"	1A:10B:C	24160B
23463B	5 lb ABC w/ Vehicle Bracket	5 lb	10.4 lb	15¼"	7¼"	4¼"	3A:40B:C	24530B
23390B	5 lb ABC w/ Wall Hook	5 lb	10.4 lb	15¼"	7½"	4¼"	3A:40B:C	24530B
23396B	10 lb ABC w/ Wall Hook	10 lb	18 lb	18¼"	7¾"	5¼"	4A:80B:C	366242K
23497B	20 lb ABC w/ Wall Hook	20 lb	33 lb	21½"	9¼"	7¼"	6A:120B:C	292474K
23471B	2.75 lb BC w/ Vehicle Bracket	2.75 lb	5.4 lb	14¾"	5½"	3"	10B:C	24160B
23476B	5 lb BC w/ Wall Hook	5.5 lb	10.4 lb	15¼"	7¼"	4¼"	40B:C	24530B
23781B	10 lb BC w/ Wall Hook	10 lb	18 lb	19½"	8½"	5¼"	60B:C	366242K
23482B	20 lb BC w/ Wall Hook	20 lb	33 lb	21½"	9¼"	7¼"	120B:C	292474K

EXTRA HIGH-FLOW DRY CHEMICAL FIRE EXTINGUISHERS

Featuring steel cylinders, internal siphon tubes, and heavy-duty chrome-plated brass valves, these high-flow units come with dry chemical agent discharge rates exceeding the minimum one-pound-per-second recommendation of NFPA for pressure, three dimensional, and obstacle fires. USCG approved, with bracket listed on the UL label, and meet D.O.T. requirements.

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
21006158B	10 lb ABC w/ Wall Hook	10 lb	18 lb	19"	8"	5"	1A:20B:C	366242K
21006160B	20 lb ABC w/ Wall Hook	20 lb	33 lb	21"	9"	7"	4A:60B:C	292474K
21006159B	10 lb Purple K w/ Wall Hook	10 lb	18 lb	19"	8"	5"	20B:C	366242K
21006161B	20 lb Purple K w/ Wall Hook	20 lb	33 lb	21"	9"	7"	60B:C	292474K



21006158B

BRIGADE CARTRIDGE OPERATED PORTABLES

Offering the very best in firefighting performance, this line of extinguishers are available in ABC Multi-Purpose, BC Regular, or Purple-K dry chemical to address industrial fire hazards. They're fitted with low-maintenance swivel discharge nozzles to accommodate both left and right-handed operators. Plus they come with more extinguishing agent for higher fire ratings, longer range, extended discharge times, and higher flow rates. UL listed and USCG approved.



Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
466521B	10 lb ABC	10.65 lb	25.5 lb	18"	9"	5"	4A:40B:C	466541B
466523B	10 lb PK	10.5 lb	25.5 lb	18"	9"	5"	60B:C	466541B
466527B	20 lb ABC	21 lb	45.5 lb	23"	11"	6"	10A:60B:C	466542B
466564B	20 lb ABC High Flow	21 lb	45.5 lb	23"	11"	6"	2A:40B:C	466542B
466528B	20 lb BC	23 lb	47.5 lb	23"	11"	6"	60B:C	466542B
466529B	20 lb PK	22 lb	46.5 lb	23"	11"	6"	80B:C	466542B
466533B	30 lb ABC	25 lb	51 lb	23"	12"	7"	10A:80B:C	466543B
466539B	30 lb BC	29 lb	55 lb	23"	12"	7"	120B:C	466543B
466534B	30 lb PK	28.5 lb	54.4 lb	23"	12"	7"	120B:C	466543B



466521B



589AX



COMPLIANCE FLOW DRY CHEMICAL FIRE EXTINGUISHER

Featuring superior vertical and horizontal range, thanks to a 240 psi operating pressure, this extinguisher has a high UL rating and comes standard with a rubber boot and gauge guard.

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
589AX	30 lb ABC w/ Wall Hook	30 lb	58 lb	26"	11"	8"	10A:160B:C	12033AX

RED LINE® CARTRIDGE OPERATED FIRE EXTINGUISHERS

Designed to protect ordinary-to-high-risk hazards in industries where the occurrence or possibility of fire is high, these cartridge-operated extinguishers offer increased reliability, on-the-spot recharge, ease of service, and superior firefighting performance.



Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
435109AS	20 lb ABC w/ Wall Hook	35 lb	20"	10"	6"	6A:60B:C	14091AS
435151AS	30 lb ABC w/ Wall Hook	49.5 lb	22"	11"	7"	10A:80B:C	14098AS



435109AS

6 | FIRE EXTINGUISHERS

AUTOMOTIVE FIRE EXTINGUISHERS

For an extra measure of safety for cross-country or cross-town trips, these automotive models can extinguish fires in seconds.



440162K

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
440162K	Fire Control FC110 2.5 lb ABC w/ Plastic Strap Bracket	2.4 lb	3.9 lb	14 $\frac{1}{16}$ "	4 $\frac{1}{2}$ "	3 $\frac{1}{4}$ "	1A:10B:C	420118K
466423K	Fire Control FC110M 2.5 lb ABC w/ Metal Valve, Plastic Bracket and Metal Strap (Rechargeable)	2.4 lb	3.9 lb	14 $\frac{1}{4}$ "	4 $\frac{1}{2}$ "	3 $\frac{1}{4}$ "	1A:10B:C	466401K
466425K	Fire Control FC340M-VB 5 lb ABC w/ Metal Valve, Metal Bracket and Metal Strap (Rechargeable)	5.5 lb	8.4 lb	16 $\frac{7}{8}$ "	5 $\frac{3}{4}$ "	4 $\frac{1}{2}$ "	3A:40B:C	466400K
440160K	Fire Control FC5 2 lb BC w/ Plastic Strap Bracket	2 lb	2.6 lb	11 $\frac{1}{16}$ "	4 $\frac{1}{2}$ "	3 $\frac{1}{4}$ "	5B:C	420118K
440161K	Fire Control FC10 2.5 lb BC w/ Plastic Bracket and Metal Strap	2.5 lb	3.9 lb	14 $\frac{1}{16}$ "	4 $\frac{1}{2}$ "	3 $\frac{1}{4}$ "	10B:C	420118K
466422K	Fire Control FC10M 2.5 lb BC w/ Metal Valve, Plastic Bracket and Metal Strap (Rechargeable)	2.5 lb	4.4 lb	14 $\frac{1}{4}$ "	4 $\frac{1}{2}$ "	3 $\frac{1}{4}$ "	10B:C	466401K
21006287K	Auto FX II 2 lb BC w/ Plastic Strap Bracket (Gray Color Cylinder)	2 lb	2.6 lb	11 $\frac{1}{16}$ "	4 $\frac{1}{2}$ "	3 $\frac{1}{4}$ "	5B:C	420118K



AUTOMOTIVE EXTINGUISHERS



In 2013, there were 164,000 highway vehicle fires resulting in over \$1.1 billion in direct damages. The DOT requires vehicles used to transport hazardous materials in a quantity that requires placarding must be equipped with a fire extinguisher having an UL rating of 10B:C or more. A vehicle that is not used to transport hazardous materials must be equipped with either a fire extinguisher having UL ratings of 5B:C or more; or two fire extinguishers, each of which has a UL rating of 4B:C or more.

FMCSA. *Parts & Accessories Necessary for Safe Operation.* fmcsa.dot.gov/regulations/title49/section/393.95. 2017.



417TCAX

MULTI-PURPOSE CHROME FIRE EXTINGUISHERS

Multi-purpose units effectively fight Class A, B, and C fires and are a popular choice for vehicles and watercraft. They have the highest UL rating per size and are attractive and easy to maintain.

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
417TCAX	2.5 lb ABC w/ Vehicle/Marine Bracket	2.5 lb	5.5 lb	15 $\frac{1}{2}$ "	5 $\frac{3}{4}$ "	3"	1A:10B:C	817AX
500TCAX	5 lb ABC w/ Vehicle/Marine Bracket	5 lb	9.5 lb	15 $\frac{1}{4}$ "	7 $\frac{1}{4}$ "	4 $\frac{1}{4}$ "	2A:10B:C	12313AX



CHROME DRY CHEMICAL FIRE EXTINGUISHER

Perfect for kitchens, garages, boats, and vehicles, it is designed for combating flammable liquid and pressurized gas fires. Plus it is electrically non-conductive and will not bake to hot surfaces, allowing for easy clean up.



620TCAX

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
620TCAX	1 lb BC w/ Vehicle Bracket	1 lb	2.5 lb	10"	3 $\frac{1}{2}$ "	2 $\frac{1}{2}$ "	2B:C	-

DISPOSABLE DRY CHEMICAL FIRE EXTINGUISHERS

Lightweight and easy to use, these disposable extinguishers are the perfect answer for areas that need supplemental protection. Their seamless aluminum cylinders have no welds, so they won't leak either.

Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
466142K	FA110 2.5 lb ABC w/ Plastic Strap Bracket	2.4 lb	3.9 lb	14 ³ / ₁₆ "	4 ¹ / ₂ "	3 ¹ / ₄ "	1A:10B:C	420118K
21006206K	KK2 1 lb BC w/ Shroud	1 lb	2 lb	10"	2 ⁷ / ₈ "	2 ⁷ / ₈ "	2B:C	-
4004000K	Fyr Fyter 100D 1 lb BC w/ Wall Hook (Pindicator)	1 lb	2 lb	10"	2 ⁷ / ₈ "	2 ⁷ / ₈ "	2B:C	-
4104000K	Fyr Fyter 210D 2 lb BC w/ Plastic Strap Bracket (Pindicator)	2 lb	2.7 lb	12 ³ / ₄ "	2 ⁷ / ₈ "	2 ⁷ / ₈ "	5B:C	366325K
21005944K	FA5B 1.5 lb BC w/ Plastic Strap Bracket	1.5 lb	2.4 lb	11 ¹ / ₁₆ "	4 ¹ / ₂ "	3 ¹ / ₄ "	5B:C	420118K
466141K	FA10G 2.5 lb BC w/ Plastic Strap Bracket	2.5 lb	3.9 lb	14 ³ / ₁₆ "	4 ¹ / ₂ "	3 ¹ / ₄ "	10B:C	420118K



466142K

MARINE FIRE EXTINGUISHERS

Meeting U.S. Coast Guard standards for hand-portable extinguishers, these marine units are effective on flammable fuels—gas, oil, and grease.



Part No	Description	Net Agent Wt (Avg)	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
466627K	Mariner 110 2.5 lb ABC w/ Plastic Strap Bracket	2.5 lb	3.9 lb	14 ³ / ₁₆ "	4 ¹ / ₂ "	3 ¹ / ₄ "	1A:10B:C	420118K
466635K	Mariner 5 2 lb BC w/ Plastic Strap Bracket	2 lb	3.1 lb	11 ¹ / ₁₆ "	4 ¹ / ₂ "	3 ¹ / ₄ "	5B:C	420118K
466179K	Mariner 5 2 lb BC w/ Plastic Strap Bracket	2 lb	3.1 lb	11 ¹ / ₁₆ "	4 ¹ / ₂ "	3 ¹ / ₄ "	5B:C	420118K
466636K	Mariner 2 lb PWC w/ Plastic Strap Bracket (Pindicator)	2 lb	3.1 lb	12 ³ / ₄ "	2 ⁷ / ₈ "	2 ⁷ / ₈ "	5B:C	366325K
466628K	Mariner 10 2.5 lb BC w/ Plastic Strap Bracket	2.5 lb	3.9 lb	14 ³ / ₁₆ "	4 ¹ / ₂ "	3 ¹ / ₄ "	10B:C	420118K
21008634K	Auto/Marine 2.5 lb BC w/ Plastic Strap Bracket	2.5 lb	3.9 lb	14 ³ / ₁₆ "	4 ¹ / ₂ "	3 ¹ / ₄ "	10B:C	420118K



466636K

MARINE EXTINGUISHERS

The United States Coast Guard requires Coast Guard hand-portable fire extinguishers with a UL Class B rating and a marine-type mounting bracket for motorboats using flammable fuels. It is recommended that extinguishers be mounted in a readily accessible position, away from the flammable areas such as a galley or engine compartment. When selecting a fire extinguisher for marine use, make sure that the bracket used is the one shown on the extinguisher label.



**REQUIRED PORTABLE FIRE EXTINGUISHERS
(motorboats without a fixed fire extinguishing system)**

Length of Boat	Minimum Number of 5-B Rated Fire Extinguishers
Under 26 Feet	1
26 and over, but under 40 feet	2
40 and over, but not over 65 feet	3

8 | FIRE EXTINGUISHERS

EXTRA PURPLE K FIRE EXTINGUISHERS



23778B

Designed for use on high-hazard Class B and C fires, these high-performance units are generally superior to other dry chemicals, making them ideal for industrial and commercial settings where flammable liquids are stored.

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
23485B	2.5 lb Purple K w/ Wall Hook	5.8 lb	14 $\frac{7}{8}$ "	5 $\frac{1}{2}$ "	3"	10B:C	24160B
23488B	5 lb Purple K w/ Wall Hook	10.4 lb	15 $\frac{1}{4}$ "	7 $\frac{1}{4}$ "	4 $\frac{1}{4}$ "	30B:C	24530B
23778B	10 lb Purple K w/ Wall Hook	17 lb	18 $\frac{1}{2}$ "	7 $\frac{3}{4}$ "	5 $\frac{1}{4}$ "	80B:C	366242K
23495B	20 lb Purple K w/ Wall Hook	32 lb	21 $\frac{1}{2}$ "	9 $\frac{1}{4}$ "	7 $\frac{1}{4}$ "	120B:C	292474K



EXTRA HALOTRON® I FIRE EXTINGUISHERS



24567B

Clean-agent stored-pressure units offer an extended discharge range for effective protection of computer rooms, telecommunications, robotics, and other high-tech areas.

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
24563B	2.5 lb Halotron I w/ Vehicle Bracket	6.9 lb	14 $\frac{7}{8}$ "	6 $\frac{1}{8}$ "	3"	2B:C	420118K
24567B	5 lb Halotron I w/ Wall Hook	10.6 lb	15 $\frac{1}{4}$ "	6 $\frac{1}{8}$ "	4 $\frac{1}{4}$ "	5B:C	24530B
23082B	11 lb Halotron I w/ Wall Hook	23 lb	16 $\frac{3}{16}$ "	8 $\frac{3}{8}$ "	7 $\frac{1}{4}$ "	1A:10B:C	23131B
23097B	15.5 lb Halotron I w/ Wall Hook	26.5 lb	17 $\frac{1}{2}$ "	8 $\frac{3}{4}$ "	7 $\frac{1}{4}$ "	2A:10B:C	23131B



466728K

PRO PLUS™ HALOTRON® I FIRE EXTINGUISHERS

Featuring a clean agent that leaves no residue, these environmentally safe specialty extinguishers protect computer rooms and other high-tech areas.

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
466727K	2.5 lb Halotron I w/ Metal Strap Bracket	6.25 lb	14 $\frac{7}{8}$ "	6 $\frac{1}{16}$ "	3"	2B:C	420118K
466728K	5 lb Halotron I w/ Wall Hook	10 lb	15 $\frac{1}{4}$ "	6 $\frac{1}{16}$ "	4 $\frac{1}{4}$ "	5B:C	24530B
466729K	11 lb Halotron I w/ Wall Hook	23 lb	16 $\frac{3}{16}$ "	7 $\frac{1}{4}$ "	7 $\frac{1}{4}$ "	1A:10B:C	23131B
466730K	15.5 lb Halotron I w/ Wall Hook	26.5 lb	17 $\frac{1}{2}$ "	8 $\frac{3}{4}$ "	7 $\frac{1}{4}$ "	2A:10B:C	23131B



21005726K

NON-MAGNETIC MRI FIRE EXTINGUISHER

Manufactured using special components, this single-use extinguisher has been independently tested, receiving the MR Conditional Rating. It's suitable for protecting occupancy areas outside magnetic resonance imaging suites.

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
21005726K	5 lb ABC MR w/ Wall Hook	7.75 lb	16"	7 $\frac{1}{2}$ "	4 $\frac{1}{2}$ "	3A:40B:C	—

NON-MAGNETIC WATER MIST FIRE EXTINGUISHERS

These water mist extinguishers contain de-ionized water (sold separately) making them the best extinguishers for protection of hospital environments, valuable books and documents, telecommunication facilities and “clean room” manufacturing facilities. MR conditional—non-magnetic, construction tested by an independent agency for use in MRI facilities to 11.7 Tesla (including wall hanging bracket).
NOTE: Units ship empty.



270NMAX

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
270NMAX	1.75 gal Water Mist w/ Wall Hook	7 lb	24½"	11"	7"	2A:C	-
272NMAX	2.5 gal Water Mist w/ Wall Hook	8 lb	27½"	11"	7"	2A:C	-

CO₂ FIRE EXTINGUISHERS

The right choice for data processing centers, labs, telecommunication rooms, food storage, processing areas, and other places where contamination and/or clean up is a concern, these CO₂ models use liquefied gas, which effectively fights Class B and C fires.



21111B

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
21111B	Badger Extra 5 lb CO ₂ w/ Wall Hook	15 lb	17"	8½"	5¼"	5B:C	270191K
21106B	Badger Extra 10 lb CO ₂ w/ Wall Hook	30 lb	19¾"	10½"	6½"	10B:C	290511K
21103B	Badger Extra 15 lb CO ₂ w/ Wall Hook	40 lb	26"	10½"	6½"	10B:C	290511K
21096B	Badger Extra 20 lb CO ₂ w/ Wall Hook	51 lb	26"	12"	8"	10B:C	294147K
466180K	Kidde Pro 5 lb CO ₂ w/ Wall Hook	15 lb	17"	8½"	5¼"	5B:C	270191K
466181K	Kidde Pro 10 lb CO ₂ w/ Wall Hook	30 lb	19¾"	10½"	6½"	10B:C	290511K
466182K	Kidde Pro 15 lb CO ₂ w/ Wall Hook	40 lb	26"	10½"	6½"	10B:C	290511K
466183K	Kidde Pro 20 lb CO ₂ w/ Wall Hook	51 lb	26"	12"	8"	10B:C	294147K



DID YOU KNOW?

Although foam fire extinguishers are rated for use on both Class A and Class B fires, they are normally installed where a spill or pool-type fire could occur. When foam is applied from an extinguisher, it will naturally spread across the burning liquid surface, effectively smothering the fire. If the flammable liquid vapor is prevented from contacting air, the fire is extinguished. Although re-ignition is a possibility with other extinguishing agent applications, it is nearly impossible due to the foam blanket preventing fuel vapors from contacting air.

FOAM FIRE EXTINGUISHERS

Thanks to their air aspirated nozzles, these units offer an easy and effective defense against Class A and B fires. They're ideal for use in emergency first response vehicles.
NOTE: Units ship empty.



250AX

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
250AX	2.5 gal AFFF Foam w/ Wall Hook	11 lb	24½"	9"	7"	3A:20B	12032AX
254AX	6 L AFFF Foam w/ Wall Hook	7.5 lb	19"	8"	7"	2A:10B	12032AX

UNIVERSAL ULTRA FOAM FIRE EXTINGUISHER

Effective on both Class A and B fires, this extinguisher eliminates the application guesswork associated with other foam units. Its chemical has no offensive odors and is non-toxic, environmentally friendly, and biodegradable. Its also easy to clean up.
NOTE: Unit ships empty.



23697B



Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
23697B	2.5 gal AR-AFFF Foam	12 lb	24½"	8¾"	7"	1A:30B	292474K

10 | FIRE EXTINGUISHERS



23171B



21008173K



570AX



20127B



WET CHEMICAL & WATER FIRE EXTINGUISHERS

Designed to supplement commercial kitchen fire suppression systems, **Wet Chemical** units are easy to use and very effective in fighting difficult cooking-media fires. The original firefighting tool, these **Water** units perform better, last longer, and are the number one choice for virtually all hazards where class A-type materials may be present.

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
25064B	Badger Extra 6 L Wet Chemical w/ Wall Hook	15 lb	19½"	8¾"	7"	K	23131B
23171B	Badger Extra 2.5 gal Wet Chemical w/ Wall Hook	19 lb	24½"	8¾"	7"	K	292474K

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
16888B	Badger Extra 2.5 gal Water w/ Wall Hook (Ships Empty)	8 lb	24¾"	8¾"	7"	2A	292474K
466403K	Kidde Pro 2.5 gal Water w/ Wall Hook (Ships Empty)	8 lb	24¾"	8¾"	7"	2A	292474K
04795K	Metal Charging Adapter (For Water & Wet Chemical Extinguishers)						

KITCHEN FIRE EXTINGUISHER RESSP

UL listed to 711A (residential cooking equipment), this special purpose extinguisher meets NFPA 10 and features a proprietary nozzle design for a broad, dispersed discharge of agent. It also delivers it at a high volume, low velocity.

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	UL Listing	Retention Bracket P/N
21008173K	2.5 lb BC w/ Wall Hook	3.9 lb	13¾"	4½"	3¼"	711A*	420118K

*Residential Cooking Equipment

CLASS D DRY POWDER FIRE EXTINGUISHER

Designed for use on combustible metal fires, this dry powder unit is fitted with a "soft-flow" extension applicator. This "tip" keeps the operator away from extreme heat and toxic fumes caused by burning material. Unit comes with a special corrosion-resistant yellow (Class D) color-coded paint finish too. FM approved.

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating	Retention Bracket P/N
570AX	30 lb Sodium Chloride w/ Wall Hook	53 lb	35"	13"	8"	N/A	12033AX

WHEELED STORED PRESSURE PORTABLES

Offering economical protection, these wheeled units are designed for single-person operation and to pass easily through standard doorways. They also contain the highest percentage of essential base ingredients found in the industry, making them ideal for protecting commercial and industrial property from many forms of high-risk fire hazards.

Part No	Description	Ship Wt	Unit Ht	Unit Width	Shell Dia	Rating
20127B	50 lb ABC w/ 25' Hose	140 lb	46¼"	23"	23"	20A:160B:C
20180B	50 lb PK w/ 25' Hose	140 lb	46¼"	23"	23"	160B:C
20653B	125 lb ABC w/ 50' Hose	300 lb	58"	28"	39¼"	40A:240B:C
20684B	125 lb PK w/ 50' Hose	300 lb	58"	28"	39¼"	240B:C

HEAVY-DUTY DOLLY CART

Easily moves larger, heavier extinguishers. Fits cylinders 7"–8" Dia.

Part No	Description
859AX	Dolly Cart



859AX



UNIVERSAL STRAP BRACKETS

Part No	Description
UB25BR	Strap Bracket (For 2.5 & 2.75 lb D/C & Halon Extinguishers)
UB5BR	Strap Bracket (For 5 & 6 lb D/C & Halon Extinguishers)

UB25BR




UB5BR



UNIVERSAL SPRING CLIP BRACKETS

Part No	Description
UBRKBR	Clip Bracket (For 2.5 & 2.75 lb D/C & Halon Extinguishers)
5BRKBR	Clip Bracket (For 5 & 6 lb D/C & Halon Extinguishers)

UBRKBR

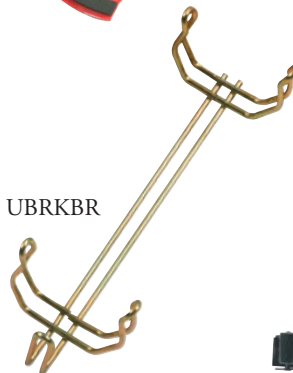

UNIVERSAL VEHICLE BRACKETS

Part No	Description
12313AX	Vehicle Bracket (For 4¼"–4½" Dia Shells)
12034AX	Vehicle Bracket (For 4⅞"–5⅝" Dia Shells)
12031AX	Vehicle Bracket (For 5¾"–6¼" Dia Shells)
12032AX	Vehicle Bracket (For 6½"–7" Dia Shells)
13506AX	Vehicle Bracket (For 7¼"–7½" Dia Shells)
12033AX	Vehicle Bracket (For 7¾"–8" Dia Shells)



12313AX

FORKLIFT BRACKET

Designed to work with a **Strap Bracket** (sold separately), it helps secure an extinguisher to a rectangular forklift support.

Part No	Description
21009952K	Forklift Bracket



21009952K In Use



21009952K





MYTAGBR



4PTAGBR

EXTINGUISHER ACCESSORIES

Part No	Description
UPPNBR	Fire Extinguisher Pull Pin
259057K	Plastic Pull Pin (Kidde)
CNDSRBR	9" Extinguisher Tamper Seal, Red, Bag/500
CNDSYBR	9" Extinguisher Tamper Seal, Yellow, Bag/500
CNDSBKBR	9" Extinguisher Tamper Seal, Black, Bag/500
CNDSBLBR	9" Extinguisher Tamper Seal, Blue, Bag/500
CNDSGBR	9" Extinguisher Tamper Seal, Green, Bag/500
4PTAGBR	Plastic 4-Year Inspection Tag
PTAGBR	Plastic Inspection Tag (One Year Only)
MYTAGBR	Metal 4-Year Inspection Tag



259057K



UPPNBR



CNDSRBR



CUSTOMSTAMP2BR



CUSTOMSTAMP1BR

CUSTOM-IMPRINTED SELF-INKING STAMP KITS

Kits come complete with stamp, ink, and dry cartridge and easily stamp standard and coated card stock. Stamps feature clear positioning windows for accurate positioning and replaceable ink cartridges. **STAMP1** offers 2500 impressions and **STAMP2** 8000 impressions per bottle of ink. **NOTE:** Signed proof must be received before order is processed. Allow one week for delivery.

Part No	Description
CUSTOMSTAMP1BR	Stamp Kit, 1½" x 3"
CUSTOMSTAMP2BR	Stamp Kit, ¾" x 1¾"
DIC1BR	Dry Ink Cartridge (For STAMP1)
DIC2BR	Dry Ink Cartridge (For STAMP2)

CUSTOM ORDERS

Contact your Account Manager for ordering details.



VCBBR

BVCBBR


NBBR

NWBBR

BWBBR

ASSORTED BRUSHES

Part No	Description
VCBBR	Valve Cleaning Brush
BVCBBR	Brass Valve Cleaning Brush
NBBR	Nylon Valve Brush
NWBBR	Nylon Cleaning Brush
BWBBR	Brass Cleaning Brush
WBBR	Wire Handled Brush
CWBBR	Cylinder Wire Brush
PDBBR	Pipe Dope Brush



WBBR



CWBBR



PDBBR



VINYL FIRE SAFETY SIGN

Self-adhesive sign quickly identifies fire equipment and is made for indoor and outdoor use, making it ideal for industrial, utility, commercial, and institutional environments. 14" x 3½". White/Red.

Part No	Description
85261BY	"Fire Extinguisher" w/ Arrow, Vinyl



85261BY

ALUMINUM FIRE SAFETY SIGN

Sign features silk-screened aluminum that's oven baked for added durability. Combine its robust construction with pre-drilled mounting holes and it's the ideal sign for porous surfaces, like concrete block or brick. 4" x 12". White/Red.

Part No	Description
2108LABR	"Fire Extinguisher" w/ Arrow, Aluminum



2108LABR

EXTINGUISHER COVERS

Made of reinforced vinyl, with hook-and-loop closures, these covers are clearly labeled with large black imprints, and black trim. They fit portable, pressurized, and cartridge-operated extinguishers. Red.

Part No	Description
FEC1BR	FE Cover w/o Window, 20" x 11½"
FEC1WBR	FE Cover w/ Window, 20" x 11½"
FEC2BR	FE Cover w/o Window, 25" x 16½"
FEC2WBR	FE Cover w/ Window, 25" x 16½"
FEC3BR	FE Cover w/o Window, 31" x 16½"
FEC3WBR	FE Cover w/ Window, 31" x 16½"



FEC1BR



FEC1WBR
In Use



FEC7BR

HEAVY-DUTY EXTINGUISHER COVERS

Made of acrylic-coated polyester, these covers feature hook-and-loop closures. They fit portable, pressurized, and cartridge-operated extinguishers and have a minimum five-year lifespan—outdoors, under normal conditions. Red.

Part No	Description
FEC10BR	Heavy-Duty FE Cover, 18½" x 7"
FEC7BR	Heavy-Duty FE Cover, 20" x 11½"
FEC8BR	Heavy-Duty FE Cover, 25" x 16½"
FEC9BR	Heavy-Duty FE Cover, 30" x 16½"

WHEELED EXTINGUISHER COVERS

Available in standard reinforced vinyl or heavy-duty, acrylic-coated polyester, these covers use hook-and-loop closures and come with black imprint and black trim. Red.

Part No	Description
WUC1BR	Standard Wheeled FE Cover, 53"H x 42"W x 30"D
WUC2BR	Standard Wheeled FE Cover, 58"H x 52"W x 38"D
WUC3BR	Standard Wheeled FE Cover, 54"H x 16"W x 27"D
WUC4BR	Heavy-Duty Wheeled FE Cover, 53"H x 42"W x 30"D
WUC5BR	Heavy-Duty Wheeled FE Cover, 58"H x 52"W x 38"D
WUC6BR	Heavy-Duty Wheeled FE Cover, 54"H x 16"W x 27"D



WUC1BR



WUC3BR

IN USE PICTURES MAY SHOW ITEMS NOT INCLUDED OR SOLD SEPARATELY.



FIRE EXTINGUISHER STAND

Ideal for wherever a fire extinguisher is required but cannot be permanently mounted, this portable stand holds a 5, 10, or 20 lb dry chemical or clean agent fire extinguisher. Its 16" x 16" base features a molded-in handle for ease of movement and a large, 2½" fill hole for adding sand (not included) to weigh it down. The heavy-duty upright attaches easily to the base—without the use of tools. Constructed from red, powder-coated steel that is pre-drilled for a fire extinguisher wall hook. Holds up to 35 lb of sand.

Part No	Description
FES1BR	Portable Stand



FES1BR In Use

STACKABLE FIRE EXTINGUISHER STAND

Stackable stand is made of tough HDPE plastic and holds a 5, 10, or 20 lb extinguisher. Its wide base resists tipping as well. OSHA compliant. Measures 34"H x 21"W x 21"D with an 8"H x 7¼"W x 7¼"D recess for an extinguisher. Red.

Part No	Description
FMRGC	Extinguisher Stand



FMRGC In Use



FES2BR In Use

FIRE EXTINGUISHER CABINET STAND

Designed for use with the FGC26BR fiberglass cabinet, this stand is a perfect match and comes with pre-drilled holes and hardware for attaching the cabinet. There are also four more pre-drilled holes for permanent installation on docks, piers, etc. Or sand can be added for temporary placement anywhere. Measures 27½" tall with a 15½" x 15½" base and 8¼" x 11¼" top surface.

Part No	Description
FES2BR	Cabinet Stand

FIRE EXTINGUISHER CABINET/STAND COMBOS

Ideal for jobsites, project areas, or remote locations, these combo units are constructed from rust- and fade-proof materials that meet Cal and OSHA requirements. They feature scored break fronts, cylinder locks, and handles for easy carry too. They're also flame resistant and nest for convenient storage and transport. Heavy-duty rubber bases and informational decals are standard as well. 43"H x 20"W x 20"D. White/Red.

Part No	Description
FGSWC10BR	Combo Stand (For 10 lb Extinguisher)
FGSWC20BR	Combo Stand (For 20 lb Extinguisher)




FGSWC10BR In Use

FIBERGLASS EXTINGUISHER CABINETS

Durably constructed, these fiberglass cabinets feature a door-sealing method that's strong enough to protect fire extinguishers against nature's harsh elements. They also come with corrosion-resistant handles, easy-view windows, and UV-resistant high-visibility red finishes.

Cabinet	Description	A (Height)	B (Width)	C (Depth)	Max Extinguisher Height
FGC10BR	Small Cab	26 $\frac{3}{8}$ "	13 $\frac{1}{4}$ "	9 $\frac{3}{4}$ "	23 $\frac{1}{2}$ "
FGC26BR	Medium Cab	27 $\frac{7}{8}$ "	15 $\frac{3}{4}$ "	10 $\frac{1}{2}$ "	24 $\frac{1}{2}$ "
FGC35BR	Large Cab	36 $\frac{3}{8}$ "	19 $\frac{3}{8}$ "	14"	33"

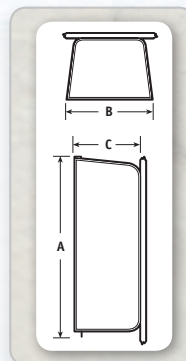

FGC26BR

FIRE EXTINGUISHER CABINET MOUNTING HEIGHT



Mounting height requirements apply to extinguishers on hangers, in cabinets, in strap-type brackets, and in the old-style wall recesses. The top of an extinguisher can't be more than 5 ft above the floor if the gross weight is 40 lb or less. Where an extinguisher gross weight exceeds 40 lb, the extinguisher is installed so the top is no more than 3.5 ft above the floor. In order to allow for cleaning under the extinguisher and to prevent corrosion, no extinguisher should ever be on the floor and the minimum mounting distance from the bottom of the extinguisher to the floor can't be less than 4 inches. The 4-inch clearance also ensures the extinguisher will be secure on a hanger and will not be easily dislodged by impact.




1017F10JL In Use



JL INDUSTRIES

AMBASSADOR SERIES STEEL CABINETS

Sturdy cabinets feature a white epoxy finish, continuous hinge door, double-strength door glass, and a 1 $\frac{1}{4}$ " face width on the trim and door. They come in surface mount, fully recessed (flat), and semi-recessed (1 $\frac{1}{2}$ " or 3" trim) models. The 3" trim model has rolled edge construction; the others are square edged. Full-glass doors have zinc-plated pull handles and roller catches.

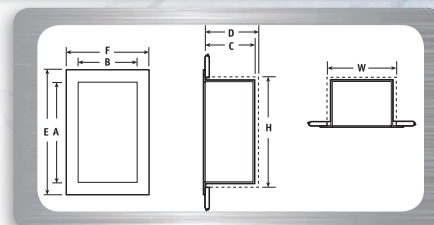

NOTE: Add wall material thickness to wall depth when determining cabinet size (for example, a standard 2" x 4" stud wall with 1/2" sheetrock would equal a 4" wall depth).

Part No	Description	Tub ID			Frame OD		Wall Opening		
		A	B	C	E	F	H	W	D
1013F10JL	Surface Mount	27 $\frac{3}{16}$ "	13 $\frac{1}{16}$ "	6 $\frac{1}{2}$ "	27 $\frac{3}{8}$ "	13 $\frac{3}{8}$ "	N/A	N/A	N/A
1013G10JL	Surface Mount w/ Lock	27 $\frac{3}{16}$ "	13 $\frac{1}{16}$ "	6 $\frac{1}{2}$ "	27 $\frac{3}{8}$ "	13 $\frac{3}{8}$ "	N/A	N/A	N/A
1015F10JL	Flat Trim	24"	10 $\frac{1}{2}$ "	6"	27 $\frac{3}{8}$ "	13 $\frac{3}{8}$ "	25"	11 $\frac{1}{2}$ "	5 $\frac{7}{8}$ "
1017F10JL	3" Trim	24"	10 $\frac{1}{2}$ "	6"	27 $\frac{3}{8}$ "	13 $\frac{3}{8}$ "	25"	11 $\frac{1}{2}$ "	3 $\frac{3}{8}$ "
1017G10JL	3" Trim w/ Lock	24"	10 $\frac{1}{2}$ "	6"	27 $\frac{3}{8}$ "	13 $\frac{3}{8}$ "	25"	11 $\frac{1}{2}$ "	3 $\frac{3}{8}$ "
1815F10JL	Flat Trim	24"	10 $\frac{1}{2}$ "	5 $\frac{1}{2}$ "	27 $\frac{3}{8}$ "	13 $\frac{3}{8}$ "	25"	11 $\frac{1}{2}$ "	5 $\frac{7}{8}$ "
1816F10JL	1 $\frac{1}{2}$ " Trim	24"	10 $\frac{1}{2}$ "	5 $\frac{1}{2}$ "	27 $\frac{3}{8}$ "	13 $\frac{3}{8}$ "	25"	11 $\frac{1}{2}$ "	4 $\frac{7}{8}$ "
1816G10JL	1 $\frac{1}{2}$ " Trim w/ Lock	24"	10 $\frac{1}{2}$ "	5 $\frac{1}{2}$ "	27 $\frac{3}{8}$ "	13 $\frac{3}{8}$ "	25"	11 $\frac{1}{2}$ "	4 $\frac{7}{8}$ "
1817F10JL	3" Trim	24"	10 $\frac{1}{2}$ "	5 $\frac{1}{2}$ "	27 $\frac{3}{8}$ "	13 $\frac{3}{8}$ "	25"	11 $\frac{1}{2}$ "	2 $\frac{3}{8}$ "
1817G10JL	3" Trim w/ Lock	24"	10 $\frac{1}{2}$ "	5 $\frac{1}{2}$ "	27 $\frac{3}{8}$ "	13 $\frac{3}{8}$ "	25"	11 $\frac{1}{2}$ "	2 $\frac{3}{8}$ "
2015F10JL	Flat Trim	27"	12"	7 $\frac{3}{4}$ "	30 $\frac{3}{8}$ "	15 $\frac{3}{8}$ "	28"	13"	7 $\frac{3}{8}$ "

IN USE PICTURES MAY SHOW ITEMS NOT INCLUDED OR SOLD SEPARATELY.

16 | FIRE EXTINGUISHER CABINETS



916LSJL In Use



JL INDUSTRIES

CLASSIC SERIES METAL EXTINGUISHER CABINETS

Made of 20 ga galvanized steel, these cabinets are designed for storing fire extinguishers. They are rust resistant and come with a white finish, keyed-alike cylinder lock, and polystyrene break front.

Part No	Description
916LSJL	Cabinet, 19 ¹ / ₁₆ "H x 8 ¹ / ₂ "W x 6 ¹ / ₄ "D
926LSJL	Cabinet, 25 ³ / ₄ "H x 9 ¹ / ₂ "W x 6 ¹ / ₄ "D
936LSJL	Cabinet, 29 ³ / ₄ "H x 10 ¹ / ₂ "W x 8 ¹ / ₄ "D
916SACBR	Clear Scored Front (For Metal Cabinets), 17 ⁷ / ₈ " x 8"
926SACBR	Clear Scored Front (For Metal Cabinets), 23 ⁷ / ₈ " x 9"
936SACBR	Clear Scored Front (For Metal Cabinets), 27 ⁷ / ₈ " x 10"
BGH6BR	Break Glass Striker w/ Chain (Hammer Style)



916FTBR In Use


METAL EXTINGUISHER CABINETS

Rugged, rust-resistant cabinets are made of 20 ga galvanized steel and have a bright-white finish. They come standard with a keyed-alike cylinder lock, breakable polystyrene front, and labels.

Part No	Description
916FTBR	Cabinet, 19 ¹ / ₁₆ "H x 8 ¹ / ₂ "W x 6 ¹ / ₄ "D
926FTBR	Cabinet, 25 ³ / ₄ "H x 9 ¹ / ₂ "W x 6 ¹ / ₄ "D
936FTBR	Cabinet, 29 ³ / ₄ "H x 10 ¹ / ₂ "W x 8 ¹ / ₄ "D
916SACBR	Clear Scored Front (For Metal Cabinets), 17 ⁷ / ₈ " x 8"
926SACBR	Clear Scored Front (For Metal Cabinets), 23 ⁷ / ₈ " x 9"
936SACBR	Clear Scored Front (For Metal Cabinets), 27 ⁷ / ₈ " x 10"
BGH6BR	Break Glass Striker w/ Chain (Hammer Style)



BGH6BR



CARBR



BUBBLE1BR In Use

BUBBLE COVERS

Covers are designed for use on JL metal extinguisher cabinets with full door styles. Both models offer transparency for good extinguisher visibility, and polycarbonate models offer extra strength for added security.

Part No	Description
BUBBLE1BR	Acrylic Cover, 22 ¹ / ₄ "H x 8 ¹ / ₂ "W x 4"D
BUBBLE2BR	Acrylic Cover, 28"H x 11 ¹ / ₁₆ "W x 5"D
BUBBLE3BR	Poly Cover, 22 ¹ / ₄ "H x 8 ¹ / ₂ "W x 4"D
BUBBLE4BR	Poly Cover, 28 ¹ / ₂ "H x 11 ¹ / ₁₆ "W x 5"D

CABINET ALARMS

Devices sound off with 105 dB alarms with extinguisher removal. They're self-adhesive, too, installing in seconds. Uses one 9V battery (not included). 2³/₄"H x 2¹/₄"W x 1"D.

Part No	Description
CARBR	Cabinet Alarm, Red
CAWBR	Cabinet Alarm, White
9VBTF	TruForce 9V Battery



STI6200BR In Use



THEFT STOPPER EXTINGUISHER ALARM

When a protected fire extinguisher is moved or jostled, this device sounds a loud instantaneous alarm. It also has a highly visible "STOP, EMERGENCY USE ONLY" to further deter unauthorized handling. And it's simple to install and comes with a deactivation cable. Red.

Part No	Description
STI6200BR	Theft Stopper Alarm

IN USE PICTURES MAY SHOW ITEMS NOT INCLUDED OR SOLD SEPARATELY.

MARK SERIES ABS EXTINGUISHER CABINETS

Injection-molded, high-impact **ABS Cabinets** are the ideal way to blanket a building with fire extinguishers. Plus these low-cost cabinets won't dent, rust, or corrode and have plenty of storage space for extinguisher placement. Their unique design eliminates a breaker bar and broken glass too. Cabinets nest, so they require less storage space and reduced shipping costs. Replacement **Cabinet** covers include "Pull Here" labels. See Cabinet Sizing Chart for dimensions.

Mark I Jr. Cabinet


Part No	Location	Description
MJMBR	Indoor/Outdoor	Mark I Jr. Red Tub w/ Red Cover
MJRCBR	Indoor	Mark I Jr. Red Tub w/ Clear Cover
MJWCBR	Indoor	Mark I Jr. White Tub w/ Clear Cover
MJWRBR	Indoor	Mark I Jr. White Tub w/ Red Cover
MJCBBR		Cabinet Cover (For Mark I Jr.), Clear
MJCRBR		Cabinet Cover (For Mark I Jr.), Red



M2JRCBR In Use

Mark II Jr. Cabinet

Part No	Location	Description
M2JMBR	Indoor/ Outdoor	Mark II Jr. Red Tub w/ Red Cover
M2JRCBR	Indoor	Mark II Jr. Red Tub w/ Clear Cover
M2JWCBR	Indoor	Mark II Jr. White Tub w/ Clear Cover
M2JWRBR	Indoor	Mark II Jr. White Tub w/ Red Cover
M2JCBR		Cabinet Cover (For Mark II Jr.), Clear
M2JCRBR		Cabinet Cover (For Mark II Jr.), Red

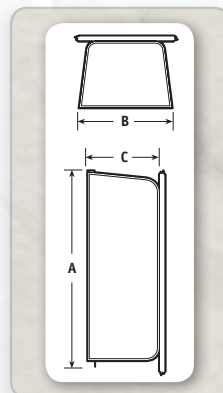

MJWCBR In Use

Mark II Cabinet

Part No	Location	Description
M2MBR	Indoor/ Outdoor	Mark II Red Tub w/ Red Cover
M2RCBR	Indoor	Mark II Red Tub w/ Clear Cover
M2WCBR	Indoor	Mark II White Tub w/ Clear Cover
M2WRBR	Indoor	Mark II White Tub w/ Red Cover
M2CBBR		Cabinet Cover (For Mark II), Clear
M2CRBR		Cabinet Cover (For Mark II), Red



FT101BR In Use

FIRE EXTINGUISHER CABINETS SIZING CHART				
Cabinet	A (Height)	B (Width)	C (Depth)	Max Extinguisher Height
Mark I Jr. Series	18 1/4"	8 1/2"	5 3/8"	16 3/4"
Mark II Jr. Series	21 1/4"	9 3/8"	6 3/8"	20"
Mark II Series	25 3/4"	9 3/8"	6 3/8"	24"

ABS EXTINGUISHER CABINET

Super-sleek styling and highly durable construction make this cabinet strong enough to protect fire extinguishers or life safety equipment from harsh environments. A clear door allows unobstructed inspection, while the polycarbonate body gives it muscle to resist the elements and rough use. Door seat is designed to provide long-term weather protection, and the quick-release catch ensures easy opening in an emergency. Red/Clear.

Part No	Description
FT101BR	ABS Cabinet, 30"H x 11"W x 8 1/4"D

INSPECTA-SHIELD™ FIRE RETARDANT

Fire retardant slows down Class A horizontal and vertical flame spreads and comes pre-mixed for easy application. It's also non-toxic, non-allergenic, colorless, and odorless (when dried). Directions included.

NOTE: UL Letter of Certification can be granted up to two years after the manufacture date. Does not prevent charring. Not recommended for outdoor use.

Part No	Description
FRG	Fire Retardant, 1 gal
SFRQT	Fire Retardant, 1 qt Spray



FRG



SFRQT

IN USE PICTURES MAY SHOW ITEMS NOT INCLUDED OR SOLD SEPARATELY.

18 | ESCAPE LADDERS & FIRE BLANKETS

ESCAPE LADDERS



468093K

Not only strong and durable, these ladders offer a tangle-free, flame-resistant design, making them easy to use as well as attach them quickly to most common windows. No tools or assembly required. Tested to 1000 lb (when the load is distributed on more than one rung) with anti-slip rungs and a five-year limited warranty.

Part No	Description
468093K	2-Story Ladder, 13'
468094K	3-Story Ladder, 25'



M2FBCBR

ABS FIRE BLANKET CABINET & ACCESSORIES

Made of high-impact, flame-resistant ABS, this rust-proof cabinet comes with an 80" x 62" wool blanket that's treated for fire retardancy. It also includes a brass lock, cover, and decals. Red/Clear.

Part No	Description
M2FBCBR	Fire Blanket & Cabinet
M2RFCBR	Fire Blanket Cabinet (Tub Only)
M2CBR	Clear Cover w/ "Pull Here" Label (For M2FBCBR)
25MMBR	Cabinet Lock (For M2FBCBR)
650200BR	Fire Blanket



650204BR

WOOL BLANKET & VINYL BAG

Blanket measures 80" x 62" and is treated for fire retardancy. The Bag measures 17"L x 12"W x 4"D and features four mounting holes with brass grommets plus a hook-and-loop closure.

Part No	Description
650204BR	Fire Blanket Bag (Only)
650200BR	Fire Blanket



650200BR



650207JL

STEEL CABINET & FIRE BLANKET

All-steel cabinet features a tailgate-style door and measures 10"H x 16"W x 7 7/8"D. Blanket is treated for fire retardancy and measures 80" x 62".

Part No	Description
650207JL	Steel Cabinet (Only)
650200BR	Fire Blanket



650200BR



JL INDUSTRIES



650203BR

FIBERGLASS FIRE BLANKET WITH CASE

Blanket comes in a low-profile plastic case complete with instruction labels and pull straps for quick deployment. Case measures 14 1/4"H x 6 3/4"W x 1 1/2"D. Blanket measures 72" x 48".

NOTE: Single use.


Part No	Description
650203BR	Blanket w/ Case

RACK & REEL FIRE HOSE

Rack hose is fully lined and comes with brass couplings. It's also pre-folded for easy installation on pin racks. Pressure ratings: 500 psi (proof test) and 250 psi (service test). FM approved.

NOTE: For emergency use only.

Part No	Description	Size
50NPSHFT	R&R Hose, Brass NPSH	1½" x 50'
50NSTFT	R&R Hose, Brass NST	1½" x 50'
75NPSHFT	R&R Hose, Brass NPSH	1½" x 75'
75NSTFT	R&R Hose, Brass NST	1½" x 75'
100NPSHFT	R&R Hose, Brass NPSH	1½" x 100'
100NSTFT	R&R Hose, Brass NST	1½" x 100'

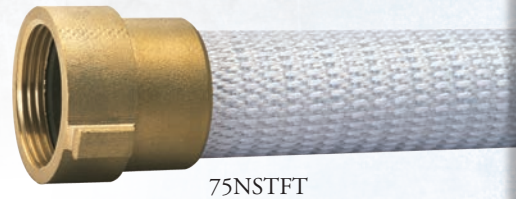

75NSTFT



POLYCARBONATE FIRE HOSE NOZZLES

Poly nozzles offer two advantages over brass versions—they are less expensive and virtually vandal proof, having no recyclable value. Nozzles come fully adjustable too. Red.

NOTE: For firefighting use only.

Adjustable Fog Nozzles

For Class A and B fires.

Part No	Description
10IPTBR	Nozzle, Fog/Stream/Shut-Off, 1" NPSH, 30 gpm
10NSTBR	Nozzle, Fog/Stream/Shut-Off, 1" NST, 30 gpm
15IPTBR	Nozzle, Fog/Stream/Shut-Off, 1½" NPSH, 78 gpm
15NSTBR	Nozzle, Fog/Stream/Shut-Off, 1½" NST, 78 gpm
25NSTBR	Nozzle, Fog/Stream/Shut-Off, 2½" NST, 210 gpm
2520NSTBR	Nozzle, Fog/Stream/Shut-Off w/ Handles, 2½" NST, 150 gpm
10GBR	Gasket (For 1" NST Nozzles)



15NSTBR



10NSTBR



25NSTBR



2520NSTBR

All-Fog Nozzles

For Class A, B, & C fires.

Part No	Description
E15IPTBR	Nozzle, Fog/Shut-Off Only, 1½" NPSH, 78 gpm
E15NSTBR	Nozzle, Fog/Shut-Off Only, 1½" NST, 78 gpm

BRASS ADJUSTABLE FOG NOZZLES

Nozzles are fully adjustable and precision machined for optimum performance—straight stream through full fog and shutoff. UL listed for Class A and B fires and FM approved. 106 gpm. Forged brass.

Part No	Description
N113BR	Nozzle, 1½" NST
I113BR	Nozzle, 1½" NPSH



N113BR

PIN RACK NIPPLE

For supporting and maintaining hose rack assemblies. Forged brass.


Part No	Description
N311BR	Nipple, 1½" NPT x 1½" NST



N311BR

20 | FIRE HOSE STORAGE DEVICES

ECONOMY HOSE REELS



FHRBR

Reels offer reliable fire hose storage at a reduced price point and come with a 16 ga steel wall bracket that swings 180°. Red.

Part No	Description	Rack Hose	SJ Hose	DJ Hose	Hose Dia	L	H	W
FHRBR	18" Hose Reel	100'	75'	–	1½"	23½"	18"	6½"
FHR24BR	24" Hose Reel	150'	100'	–	1½"	29"	24"	6¼"




HEAVY-DUTY HOSE REELS



HDR19BR

Featuring a more robust design, these reels use solid 16 ga steel sides and hubs for maximum durability. The mounting hardware is tough, too, featuring welded steel 1" x ¾" reel brackets with 1½" x ¼" steel wall brackets that swing 180°. Includes hook-and-loop back straps to secure hose. Red.

Part No	Description	Rack Hose	SJ Hose	DJ Hose	Hose Dia	L	H	W
HDR19BR	19" Reel	100'	75'	50'	1½"	23¾"	19"	5¾"
HDR25BR	25" Reel	150'	100'	75'	1½"	30"	25"	5¾"
HDR25HCBR	25" Reel (High Capacity)	300'	200'	150'	1½"	30"	25"	8¾"
		150'	100'	75'	2½"			

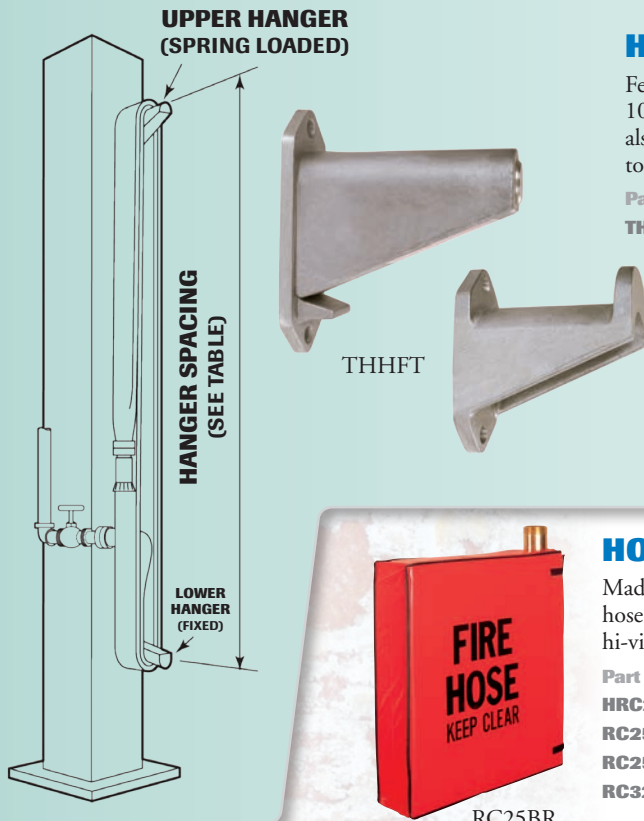

HOSE HANGER

Featuring aluminum alloy construction, this hanger easily holds 100' of lined or unlined fire hose up to 2½". Its top shoulder is also spring loaded so water pressure or a single pull is enough to release the hose. Comes with mounting instructions.

Part No	Description
THHFT	Hanger

TOTAL LOOPS OF HOSE

HOSE LENGTH	TOTAL LOOPS OF HOSE		
	2	3	4
50'	12'	8'	6"
75'	-	12'	9"
100'	-	-	12"

HOSE RACK COVERS

Made of durable vinyl, with hook-and-loop closures, these covers protect hose rack assemblies from dirt, grime, and unauthorized tampering. Their hi-vis appearance also makes them easy to find in an emergency. Red.

Part No	Description	L X H X W
HRC2BR	Rack Cover (For Hump Rack)	34" x 28½" x 6¼"
RC25BR	Rack Cover (For Pin Rack)	21" x 24" x 5"
RC25LBR	Rack Cover (For Pin Rack)	21" x 30" x 5"
RC32BR	Rack Cover (For Pin Rack)	32" x 24" x 6"



RC25BR
In Use

HOSE REEL COVERS

Covers offer a custom fit, with hook-and-loop closures, in durable vinyl. Red.

Part No	Description	L X H X W
FHRC18BR	Reel Cover	20" x 19" x 5"
FHRC24BR	Reel Cover	26" x 25" x 5"
FHRC24DWBR	Reel Cover	26" x 25" x 8"



FHRC18BR
In Use

IN USE PICTURES MAY SHOW ITEMS NOT INCLUDED OR SOLD SEPARATELY.

MUNICIPAL HAND TOOLS

A wide assortment of tools, including all of the popular sizes and styles in both storz and threaded adapters (pin or rocker lugs).

Part No	Description
AFSBR	Folding Pocket Spanner, Plastic
K48BR	Hydrant/Spanner Holder (Only)
STWBR	Storz x Universal Spanner, Aluminum
W570BR	Universal Spanner, w/ Gas Shutoff Wrench, Aluminum
W575BR	Heavy-Duty Hydrant Wrench/Spanner, Steel/Ductile Iron
W580BR	Standard Hydrant Wrench/Spanner, Steel/Ductile Iron



FEMALE X MALE BRASS HEXAGON ADAPTERS

Adapters feature a rigid hexagon design in cast brass. They're used to change threads.

Part No	Description
711BR	Hex Adpt, 1½" PCT(F) x 1½" NST(M)
712BR	Hex Adpt, 1½" NPT(F) x 1½" NST(M)
713BR	Hex Adpt, 1½" NST(F) x 1½" NPT(M)
714BR	Hex Adpt, 1½" NPSH(F) x 1½" NST(M)
716BR	Hex Adpt, 2½" NST(F) x 2½" NPT(M)



711BR

FEMALE X MALE BRASS REDUCERS

Reducers feature a pin lug design in cast brass. They're used to change threads or size.

Part No	Description
721BR	Reducer, 2½" NST(F) x 1½" NST(M)
722BR	Reducer, 2½" NPSH(F) x 1½" NST(M)
724BR	Reducer, 2½" NST(F) x ¾" GHT(M)
725BR	Reducer, 2½" NST(F) x 1½" NPSH(M)



721BR

MALE X MALE BRASS HEXAGON NIPPLE

Nipple features a rigid hexagon design in cast brass. It's used to change configuration, threads, or size.

Part No	Description
731BR	Hex Nipple, 1½" NPT(M) x 1½" NST(M)




731BR


FEMALE X MALE BRASS HEXAGON BUSHING

Bushing features a rigid hexagon design in cast brass. It's used to change threads or size.

Part No	Description
751BR	Hex Bushing, 2" NPT(F) x 2½" NST(M)



751BR In Use

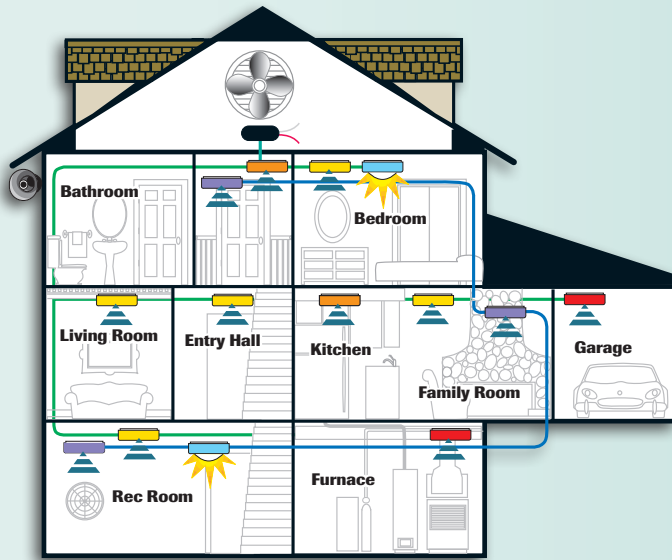

Alarm Placement Guidelines

Ionization Smoke Alarm:

Provides early detection against smoke and fire, especially effective against flaming fires.

Photoelectric Smoke Alarm:

Provides early detection against smoke and fire, especially effective against smoldering fires.

Carbon Monoxide Alarm: Detects presence of deadly carbon monoxide.

Heat Detector:

Detects temperatures 135°F or greater for areas where smoke alarms can false alarm due to auto exhaust or cooking fumes.

Strobe Light For Hearing Impaired:

For persons who cannot hear an alarm.

Relay Module:

Activates or deactivates auxiliary devices such as whole house fans, security lights or sirens.

Placement guidelines for life safety devices as recommended by the National Fire Protection Association and National Home Builders Association are Important! Refer to owners manual for proper installation and product placement information.

Kidde. CO Alarm Product Reference 2008: Product Placement Guidelines. <http://www.kidde.com>. 2008.

WORRY-FREE DC SMOKE/CO COMBO ALARM – PHOTOELECTRIC

Protecting against fire and CO, this alarm comes with a sealed lithium battery for 10 years of worry-free protection. And it uses both an advanced photoelectric sensor for smoke and an electrochemical sensor for CO. These two features communicate, too, automatically adjusting the sensitivity to better identify real hazards and reducing nuisance alarms when cooking. The alarm is also self-activating and comes standard with a test/hush button and LED indicator. Ten-year warranty.

Part No	Description
21010170*	DC Smoke/CO Unit, Sealed Lithium

*Cannot ship to AK, HI, PR, or Catalina

WORRY-FREE AC/DC SMOKE/CO COMBO ALARM – IONIZATION

Get 10 years of worry-free protection against fire and CO with this hardwired alarm. It comes with a sealed, maintenance-free lithium battery backup, voice warning, and intelligent sensor technology. There's also a test/hush button that reduces nuisance alarms, and peak level memory, which alerts users that the unit has detected CO concentrations of 100 ppm or higher. 120 VAC. Ten-year warranty.

Part No	Description
21010408*	AC/DC Smoke/CO Unit w/ Sealed Lithium Backup

*Cannot ship to AK, HI, PR, or Catalina

DC CO/FIRE/SMOKE COMBO ALARM – IONIZATION

Combining the detection capabilities of an ionization smoke sensor with that of an electrochemical sensor, this alarm offers a fast response to fast-flaming fires as well as carbon monoxide. It also adjusts its smoke sensitivity to better discriminate between a real hazard and a false one and features a front-load battery tray. And it comes with a voice warning that clearly states the present danger—smoke or carbon monoxide—announcing “Fire!” or “Warning! Carbon Monoxide!”. Ten-year warranty.

Part No	Description
9000216	DC Combo Unit, 3AA Alkaline
21025831K	Kidde AA Batteries, 4/Pkg

Batteries Included w/ All "DC & AC/DC" Units



21010170



21010408



9000216

AC/DC SMOKE/CO COMBO ALARM – PHOTOELECTRIC

Front-loading alarm offers protection against two hazards—fire and carbon monoxide—in one unit. When activated, it emits a beeping tone, followed by a voice warning that clearly announces “Fire! Fire!” or “Warning! Carbon Monoxide!” The uniquely designed front-loading battery compartment also makes battery replacement quick and easy and ensures proper installation. Manufactured with photoelectric sensors for detecting slow, smoldering fires, this alarm also includes the world’s most accurate CO sensing technology. Seven-year warranty.

Part No	Description
21007624	AC/DC Smoke/CO Unit w/ 9V Battery Backup
21025830K	Kidde 9V Batteries, 2/Pkg

**Voice Warning**

Warns of hazard by announcing “Fire, Fire” or “Warning, Carbon Monoxide.”

Peak Level Memory

Alerts user when the unit has detected CO concentrations of 100 PPM or higher.

Smart Hush

Silences the unit during nuisance alarm situations. (Smoke must be present before hush is activated.)

Two LEDs

- Red: Alarm mode.
- Green: Indicates that AC power is present.

Front-Load Battery Door

Adjustable Mounting Bracket
Allows for easy installation and alignment.

DIRECT PLUG-IN GAS/CO COMBO ALARM

Alarm features a digital readout and installs into any AC wall outlet via direct-plug or with its hide-a-way 6' power cord. It detects natural gas (methane) and propane, in addition to carbon monoxide. It also has a 9V battery backup in case the power goes out. UL listed. Five-year warranty.

Part No	Description
9000113	AC/DC Combo Wall Unit w/ 9V Battery Backup
21025830K	Kidde 9V Batteries, 2/Pkg

**SMOKE/CO COMBO ALARMS – IONIZATION**

Including a voice warning system that announces “Fire, Carbon Monoxide, Low Battery, or **Smart Hush™** activation,” these technologically advanced units are easy to install and suitable for all living areas. Units use ionization technology for excellent fast-flaming fire detection. Five-year warranty.

Part No	Description
9000102	DC Voice Alert Smoke/CO Unit, 3AA Alkaline
21006377	AC/DC Voice Alert Smoke/CO Unit w/ 2AA Battery Backup
21025831K	Kidde AA Batteries, 4/Pkg





21010167

WORRY-FREE DC SMOKE ALARMS – PHOTOELECTRIC

Equipped with 10-year sealed lithium batteries and **Smart Hush™** features, these units sound loud 85 dB alarms when activated. They are fully automatic and activate when attached to their mounting brackets. Plus they chirp, letting users know when they need replacing. Alarms use photoelectric technology for quick detection of slow, smoldering fires. Ten-year warranty.

Part No	Description
21010167*	DC LED Safety Light Smoke Unit, Sealed Lithium
21010161*	DC Voice Alert Smoke Unit, Sealed Lithium
21010164*	DC Smoke Unit, Sealed Lithium

*Cannot ship to AK, HI, PR, or Catalina



21010407

WORRY-FREE AC/DC SMOKE ALARM – IONIZATION

Featuring a sealed lithium battery backup, this hardwired unit offers 10 years of worry-free protection against fire. It features ionization technology for excellent fast-flaming fire detection as well as two LED indicators (red for alarm mode and green when AC power is present). It can also be interconnected with up to 24 **Kidde** devices (of which 18 can be initiating), including smoke, CO, and heat alarms. 120 VAC. Ten-year warranty.

Part No	Description
21010407*	AC/DC Smoke Unit w/ Sealed Lithium Backup

*Cannot ship to AK, HI, PR, or Catalina



DID YOU KNOW?

- In 2013, 1,240,000 fires were reported, resulting in 3,240 civilian deaths and \$11.5 billion in property damage.
- No Smoke Alarms were present in more than 1/3 of home fire deaths.

Marty Ahrens. *Smoke Alarms in U.S. Home Fires, NFPA*. <http://www.nfpa.org/news-and-research/fire-statistics-and-reports/fire-statistics/fire-safety-equipment/smoke-alarms-in-us-home-fires>. 2015.



0919

WIRELESS SMOKE ALARMS – IONIZATION

Wireless units make it easy to install an interconnected smoke alarm system throughout a home or business without wiring—when one alarm sounds, they all sound. Alarms use ionization technology for excellent fast-flaming detection. Ten-year warranty.

Part No	Description
0919	DC Smoke Unit, 3AA Alkaline
1279	AC/DC Smoke Unit w/ 9V Battery Backup
21025831K	Kidde AA Batteries, 4/Pkg
21025830K	Kidde 9V Batteries, 2/Pkg

Batteries Included w/ All "DC & AC/DC" Units

INTERCONNECTABLE SMOKE ALARMS – IONIZATION

Operating as a single unit or interconnected (with up to 24 **Kidde** devices on one wiring system, of which 18 can be initiating), these units use ionization technology for excellent fast-flaming fire detection. Includes 9V battery backup for power outages. Ten-year warranty.

Part No	Description
21006376	AC/DC Smoke Unit, Front-Loading Battery Door, Smart Hush, Silent Hush, Alarm Memory
21006378	AC/DC Smoke Unit, Smart Button, Smart Hush, Alarm Memory
21006379	AC/DC Smoke Unit, Exit Light, Smart Hush, Silent Hush, Alarm Memory
21007582	AC/DC Smoke Unit, Front Loading Battery Door, Smart Hush, Silent Hush, Alarm Memory, 360° Mounting Plate
21025830K	Kidde 9V Batteries, 2/Pkg



21006376



21006379

DID YOU KNOW? Smoke alarms save lives. If there is a fire in your home, smoke spreads fast and you need smoke alarms to give you time to get out. Having a working smoke alarm cuts the chances of dying in a reported fire in half. Almost two-thirds of home fire deaths resulted from fires in homes with no smoke alarms or no working smoke alarms.

- 1) Install smoke alarms inside and outside each bedroom and sleeping area. Install alarms on every level of the home. Install alarms in the basement.
- 2) It is best to use interconnected smoke alarms. When one smoke alarm sounds they all sound.
- 3) Test all smoke alarms at least once a month. Press the test button to be sure the alarm is working.
- 4) Replace all smoke alarms when they are 10 years old.

NFPA. *Smoke Alarms at Home*. <http://www.nfpa.org/education>. 2015.

DC SMOKE ALARMS – IONIZATION

Battery operated (there's no wiring required), these units offer continuous protection—even during a power outage. Alarms use ionization technology for excellent fast-flaming fire detection. UL listed.

Part No	Description
0914	Fire Sentry Smoke Unit w/o Plate, 9V Alkaline, 4", 3-Year Warranty
0914E	Fire Sentry Smoke Unit w/ Plate, 9V Alkaline, 4", 3-Year Warranty
0915E	Tamper-Resistant Smoke Unit, 9V Alkaline, 5", 10-Year Warranty, Box
440374	Tamper-Resistant Smoke Unit, 9V Alkaline, 5", 10-Year Warranty, Clam
0916E	Hush Smoke Unit, 9V Alkaline, 5", 10-Year Warranty, Box
440375	Hush Smoke Unit, 9V Alkaline, 5", 10-Year Warranty, Clam
0918E	Exit Light Smoke Unit, (2) 9V Alkaline, 10-Year Warranty
0976	Front-Loading Battery Door, Smoke Unit, 9V Alkaline, 5", 10-Year Warranty
21025830K	Kidde 9V Batteries, 2/Pkg



0914E



9000136

SEALED BATTERY DC SMOKE ALARM – IONIZATION

Unit features a 10-year sealed lithium battery and automatically activates when attached to its mounting bracket. It also comes standard with an alarm memory, **Smart Hush**, and end-of-life warning. Alarm uses ionization technology for excellent fast-flaming fire detection. UL listed. Ten-year warranty.

Part No	Description
9000136*	DC Smoke Unit, Sealed Lithium

*Cannot ship to AK, HI, PR, or Catalina



21007547

RECREATIONAL VEHICLE DC SMOKE ALARM – IONIZATION

Designed specifically for use in motor homes and RVs, this 5" alarm includes a **Smart Hush** and test button, tamper-resistant locking pin, and twist-off mounting. Unit uses ionization technology for excellent fast-flaming fire detection. RV listed. Ten-year warranty.

Part No	Description
21007547	RV DC Smoke Unit, 9V Alkaline
21025830K	Kidde 9V Batteries, 2/Pkg



21007581

FIREX® I4618 AC/DC SMOKE ALARM – IONIZATION

Interconnectable (with up to 24 devices, of which 18 can be initiating, including smoke, CO, strobe light, and heat alarms), this unit uses ionization technology for excellent fast-flaming fire detection. It also has a **Smart Hush™** button, front-loading battery door, and alarm memory indicator. Five-year warranty.

Part No	Description
21007581	Firex AC/DC Smoke Unit w/ 9V Battery Backup
21025830K	Kidde 9V Batteries, 2/Pkg



442007

DUAL SENSOR SMOKE ALARMS

Featuring both ionization and photoelectric sensing technology, these units also include flashing LEDs to signal they are functioning properly. Other standard features include a low-battery warning and a loud 85 dB alarm. UL listed. Ten-year warranty.

Part No	Description
21007915	AC/DC Combo Sensor Smoke Unit w/ 9V Battery Backup
442007	DC Combo Sensor Smoke Unit, 9V Alkaline
21025830K	Kidde 9V Batteries, 2/Pkg



21006371

SMOKE ALARMS – PHOTOELECTRIC

Alarms come with a low-battery indicator and use photoelectric technology for quick detection of slow smoldering fires. Ten-year warranty.

Part No	Description
21006371	AC/DC Quick-Connect Smoke Unit w/ 9V Battery Backup
PE9E	DC Tamper-Resistant Smoke Unit, 9V Alkaline
21025830K	Kidde 9V Batteries, 2/Pkg

ULTRA-SENSITIVE CO MONITOR

Alarm provides audible and visual notification of CO levels below 30 PPM—even during power outages. Plus it shows continuous digital readings as low as 10 PPM and updates them every 15 seconds. Ten-year warranty.

Part No	Description
21009942	DC Ultra-Sensitive Smoke Unit, 3AA Alkaline
21025831K	Kidde AA Batteries, 4/Pkg

PLUG-IN AC/DC CO ALARM WITH DIGITAL DISPLAY

Alarm provides continuous monitoring of CO levels—even during power outages—and shows CO levels recorded since its last reset. It also includes a low-battery hush, event memory, and battery pull tab for fast and easy setup. And it remains in a vertical position, regardless of the electrical socket orientation. Ten-year warranty.

Part No	Description
9000278	AC/DC CO Unit w/ Display w/ (2)AA Battery Backup
21025831K	Kidde AA Batteries, 4/Pkg

Batteries Included w/ All "DC & AC/DC" Units



21009942



9000278

WORRY-FREE DC CO ALARMS

Units provide continuous protection against elevated levels of carbon monoxide and feature 10-year sealed lithium batteries for maintenance-free operation. They also contain sensors that sound 85 dB alarms when dangerous levels of CO are detected. And they're self-activating with end-of-life signals that chirp when they need replacing.

Part No	Description
21010047*	DC CO Unit w/ Display, 10-Year Lithium
21010045*	DC CO Unit, 10-Year Lithium

* Cannot ship to AK, HI, PR, or Catalina



21010047

9C05-LP DC CO ALARM

Unit provides continuous monitoring of CO levels—even during power outages—and includes multiple mounting options: wall or table top. Ten-year warranty.

Part No	Description
9C05	DC CO Unit, 2AA Alkaline
21025831K	Kidde AA Batteries, 4/Pkg



9C05

9000146-LP DC CO ALARM

Monitoring CO levels constantly—even during power outages—this alarm's digital display feature allows for easy viewing of carbon monoxide levels from 30-999 PPM (parts per million). It will also detect and store CO levels as low as 11 PPM and up to 999 PPM with its peak level memory display. Alarm includes a slide-out door for immediate access to the batteries and a safety feature that prevents closure when batteries are missing. Ten-year warranty.

Part No	Description
9000146	DC CO Unit w/ Display, 3AA Alkaline
21025831K	Kidde AA Batteries, 4/Pkg



9000146

WORRY-FREE DIRECT PLUG-IN AC/DC CO ALARM

Offering continuous protection against elevated levels of carbon monoxide, this unit features a 10-year sealed lithium battery for maintenance-free operation. It also contains a sensor that sounds an 85 dB alarm when dangerous levels of CO are detected. And it's self-activating, with end-of-life signals that chirp when it needs replacing. It has rotating AC blades, too, to keep it vertical when plugged in, regardless of electrical socket orientation.

Part No	Description
9000280*	AC/DC Wall Unit w/ Display, 10-Year Lithium

* Cannot ship to AK, HI, PR, or Catalina



9000280



DIRECT PLUG-IN AC/DC CO ALARMS

Providing reliable operation, with plug-in simplicity, these alarms offer protection against dangerous levels of carbon monoxide. Each alarm comes with a battery backup, while **9000076** come with digital displays for easy viewing of CO levels. UL listed.

Part No	Description
21025759	AC/DC Tamper-Resistant CO Wall Unit w/ (2) AA Battery Backup, 10-Year Warranty
9000076	AC/DC CO Wall Unit w/ Display w/ 9V Battery Backup, 5-Year Warranty
21025831K	Kidde AA Batteries, 4/Pkg
21025830K	Kidde 9V Batteries, 2/Pkg



9000076

21025759

Batteries Included w/ All "DC & AC/DC" Units



21006406

WIRE-IN AC/DC CO ALARM

Unit helps warn of dangerous carbon monoxide levels and is interconnectable with other **Kidde** devices, such as smoke alarms and heat detectors. Its 9V battery back-up also provides continuous monitoring of carbon monoxide levels. Alarm includes a Smart Interconnect system, which enables the unit to alarm in a carbon monoxide pattern and sound a different pattern when interconnected to a **Kidde** smoke alarm that is in alarm mode. Five-year warranty.

Part No	Description
21006406	AC/DC CO Unit w/ 9V Battery Backup
21025830K	Kidde 9V Batteries, 2/Pkg



HD135F

AC/DC HEAT DETECTOR WITH THERMAL SENSORS

Unit responds to temperature rather than smoke and alarms if temperatures rise above 135°F. It also interconnects with up to 24 devices. 120 VAC. UL listed. Five-year warranty.

Part No	Description
HD135F	AC/DC Heat Detector w/ 9V Battery Backup
21025830K	Kidde 9V Batteries, 2/Pkg



SL177I

DUAL MODE AC LED STROBE LIGHT

Ideal for the hearing impaired, this unit provides a bright LED signal when used in conjunction with a smoke, heat, or carbon monoxide alarm. It includes a tamper-resistant pin to help deter theft too. 120 VAC. Ten-year warranty.

Part No	Description
SL177I	AC Smoke/CO Strobe Unit



9000149

ALARM ACCESSORIES

Part No	Description
SM120X	Relay Module (For Smoke Alarm)
CO120X	Relay Module (For CO Alarm)
9000149	Firex Adapter (To Kidde)
SAGBR	Smoke Alarm Guard

SMOKE SABRE™ SMOKE DETECTOR TESTER

Tests smoke detectors quickly and easily and uses safe silicone-free “smoke” to eliminate the risk of harmful residue. It also has more tests per can with the lowest cost per test. 3 oz aerosol.

Part No	Description
SMOKESABREBR	Smoke Tester



SMOKESABREBR

FIRETECH™ CANNED SMOKE

Ideal for checking the functionality of smoke alarms in the widest possible range. It offers efficient testing in a simple-to-use format—hand-held or with use of a dispenser. Plus it provides more tests per can with fast detector activation. It's also silicone-free with no CFCs and uses low GWP propellant. UL/ULC listed. 2.6 oz aerosol.

Part No	Description
FTS2BR	Canned Smoke



FTS2BR

SMOKE DETECTOR TESTER

Environmentally friendly, this non-toxic tester works great on both ionization and photoelectric smoke alarms. 2.5 oz aerosol.

Part No	Description
25SBR	Detector Tester



25SBR

CLEAN JET 100 CANNED AIR

A portable source of ultra-clean gas, this aerosol offers precision removal of dirt, dust, lint, and other particulates. It's non-flammable, too, delivering a blast of air up to 100 psi at 68°F. It's also guaranteed to leave behind no residue. 10 oz aerosol. 12/Case.

Part No	Description
SW805SY	Canned Air



SW805SY

30 | EXIT & EMERGENCY LIGHTING

RED LED EXIT SIGNS

Signs clearly mark the way out and are flame retardant with high-impact thermoplastic housings. They include solid-state chargers, universal mounting, test buttons, low-voltage disconnects, LED indicators, replaceable pop-out chevrons, and 120/277 VAC operation. 12¾"L x 7½"H x 1¾"W. Five-year warranty. White.



104EE

Part No	Description
104EE	Exit Sign, AC (Only)
105EE	Exit Sign w/ Battery Backup



148EE

ALL-WEATHER EMERGENCY LIGHT

Ideal for applications with high-humidity, oily, or corrosive, non-hazardous environments, this light comes with a low-voltage disconnect, test button, LED indicator, and solid-state charger. 120/227 VAC. 8¾"L x 12¾"H x 6"W. Five-year warranty. Gray.

Part No	Description
148EE	Emergency Light



137EE

COMBINATION RED EXIT/LIGHTING UNITS

Meeting both exit and emergency lighting needs, these economical units are compact and low profile and come in a neutral finish. They feature injection-molded, flame-resistant, high-impact thermoplastic housings as well as solid-state chargers. Other features include universal mounting, push-to-test switches, low-voltage disconnects, and LED indicators. Pop-out chevrons can be easily replaced if desired too. Universal transformer for 120/277 VAC operation. 23"L x 11"H x 2¾"W. Five-year warranty on LED lights.

Part No	Description
137EE	Combo Unit, Black
136EE	Combo Unit, White



136EE

REPLACEMENT LAMPS & BATTERIES

Designed for use in exit and emergency lighting units.

Part No	Description
274EE	120 VAC, 7 W Candelabra Screw (7C7)
279EE	145 VAC, 15 W Candelabra Screw (15T6)
258EE	6V, 5.4 W Miniature Wedge (939)
168EE	Battery, 6V, 4.5 A, 2¾" x 4" x 1½"
169EE	Battery, 6V, 7 A, 6" x 3¾" x 1¾"



274EE